



FIELDWALLPADS.com

A division of SportsGraphics


DUGOUTS

Premium Wood-Backed Dugout Rail Pads

BASEBALL PAD DESCRIPTIONS

1 FP-DOT
3-sided Top Rail Post Pad


2 FP-DOF
Dugout Flat Rail Post Pad

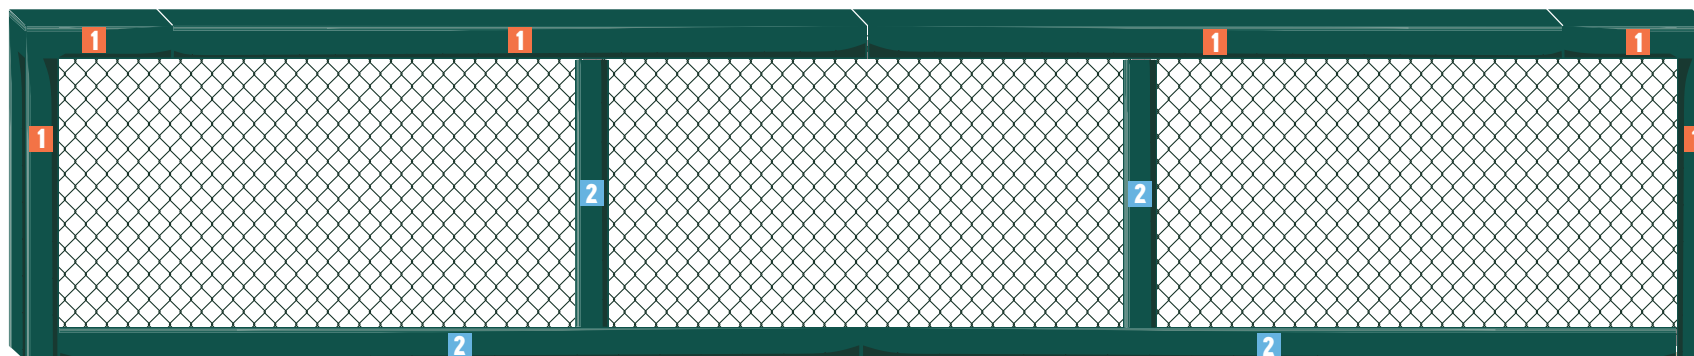

SOFTBALL PAD DESCRIPTIONS

2 FP-DOF
Dugout Flat Rail Post Pad

3 FP-DOC
Dugout Corner Rail Post Pad

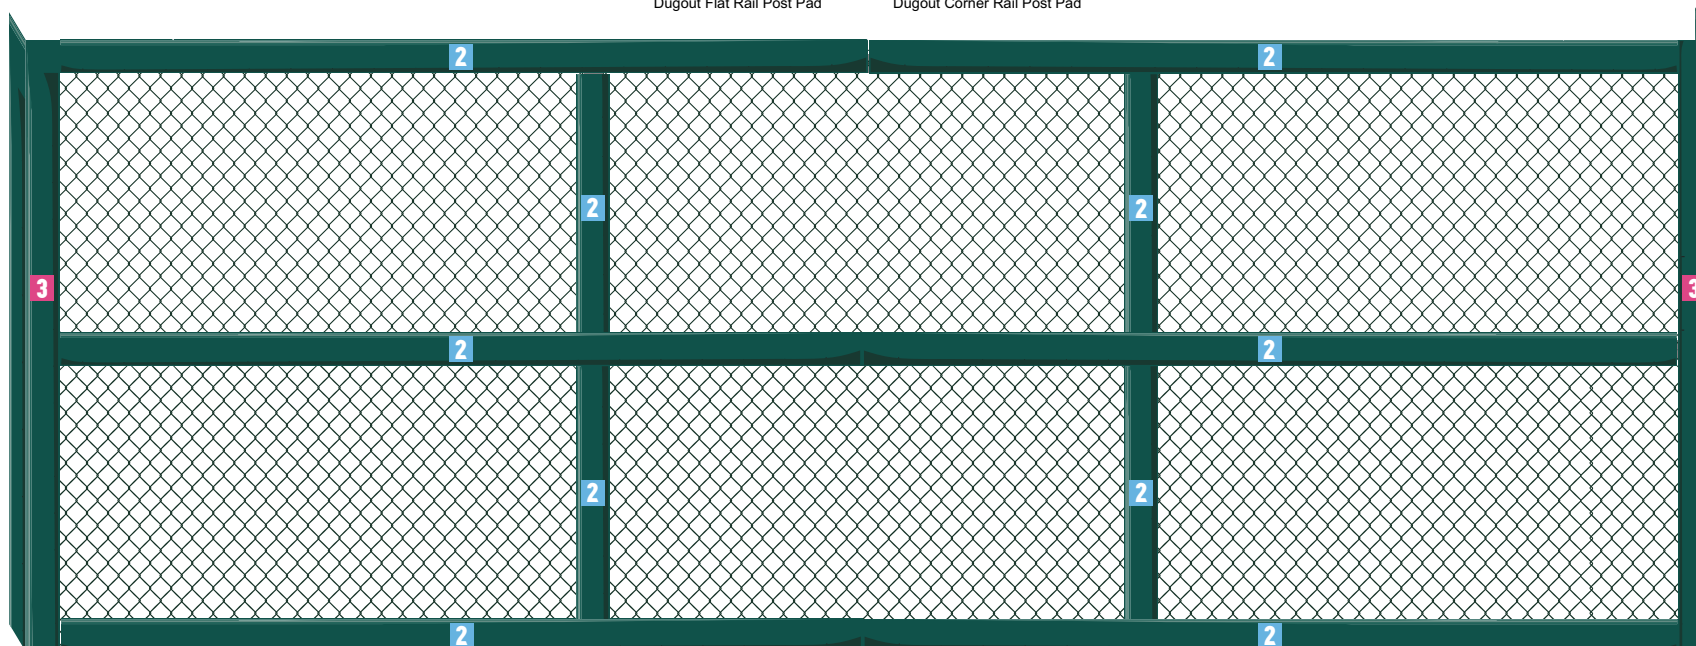



FIELDWALLPADS.com

A division of SportsGraphics

DUGOUTS


Premium Wood-Backed Dugout Rail Pads

HARDWARE SPECS

STEEL NAIL PLATE
1 3/8" x 6"



STEEL MENDING PLATE
3" x 6"

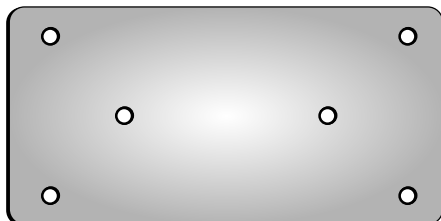

Used to reinforce and mend all top rails together. These are to be attached to the underside of the inner channel using 1.25" - 1.5" construction screws. This will help prevent the top rail pads from twisting and turning at each pad break. This is one of the first steps to installing the rail pads. Stage and lay out all top rail and end pieces (with logos facing the existing rails) on the ground. Install all mending plates at each pad break, making a shell to fit over the dugout rails. This will resemble a shell that you will flip and lift up and over the existing rails.

Used to mend all wood-backed rail pads together. Mend all pad breaks between the top rails and verticals on the backside of the pads. Six pre-drilled holes for lag screws to go into the backside of the wood, vertically and/or horizontally, based on the rail and pad layout. 2-4 lag screws per bracket are usually sufficient.

2-HOLE "C" CLAMP BRACKETS
1 1/2"



Used to attach flat verticals or flat horizontal pads into place by clamping over the bar and lag screwing into the backside of the wood.

1-HOLE "C" CLAMP BRACKETS
1 1/2"



Same as 2-hole clamp bracket, plus used exclusively for TRP-W installations.

CORNER BRACKETS
1 1/2" x 2 1/2"



Used to attach the bottom of all three-sided end pieces. May be used to firm up any area in the pads during the install. These can be anchored into the post itself or friction fit by applying pressure when lagging a screw into the wood on the backside of a pad.




FIELDWALLPADS.com

A division of SportsGraphics


Premium Wood-Backed Dugout Rail Pads

DUGOUTS


HARDWARE PLACEMENT

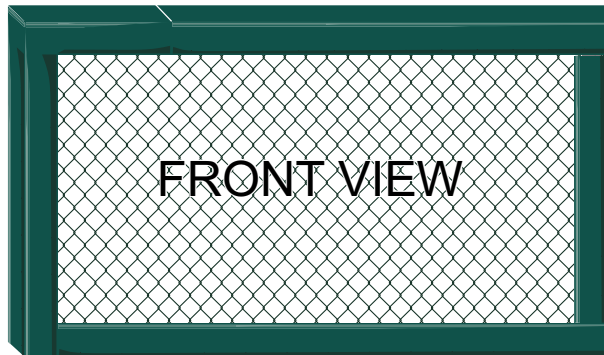


FRONT VIEW

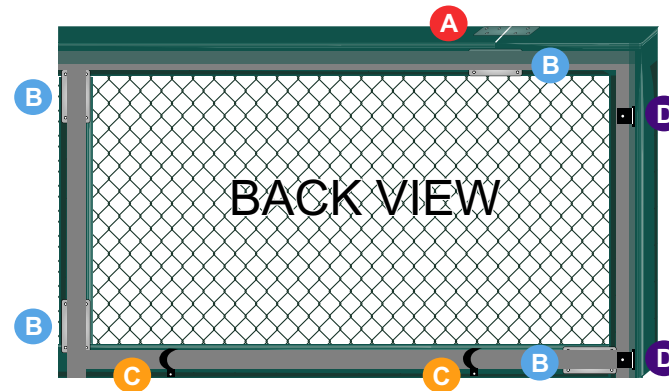


BACK VIEW




Attaches to the top underside, flush to the field side.
NOTE: Attach each pad break inside the top rail inner channel.



Attaches to backside to connect all rail sections.

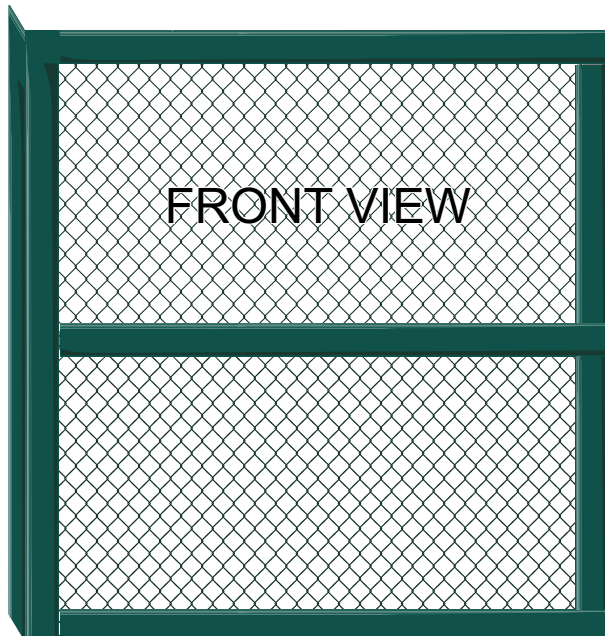

FRONT VIEW

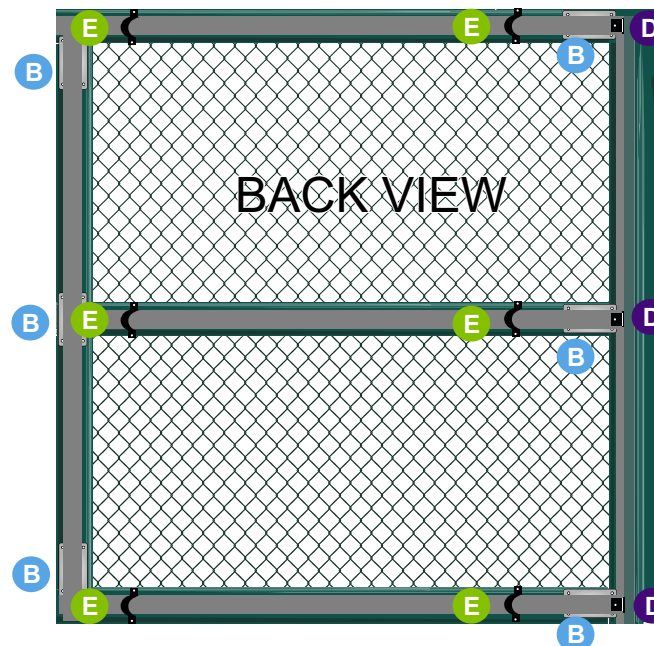

BACK VIEW



1-Hole C Clamps are used mainly on all horizontals. They come in all sizes, based on the diameter of the post/rails. These are used when lip returns are required on pads that run horizontally or vertically, as well.



Attaches to all end pieces. You can only screw into the outside pad and friction fit to the metal or use a metal self-tapping screw to go into the metal pole. Either way is acceptable.



2-Hole C Clamps are used mainly on middle vertical posts when the pad can be centered to hit both holes in the C Clamp. They come in all sizes based on the diameter of the post/rails.



FIELDWALLPADS.com

A division of SportsGraphics

Premium Wood-Backed Dugout Rail Pads

DUGOUTS


HARDWARE PLACEMENT DETAILS

A

STEEL MENDING PLATE
1 3/8" x 6"




Attaches to the top underside, flush to the field side.

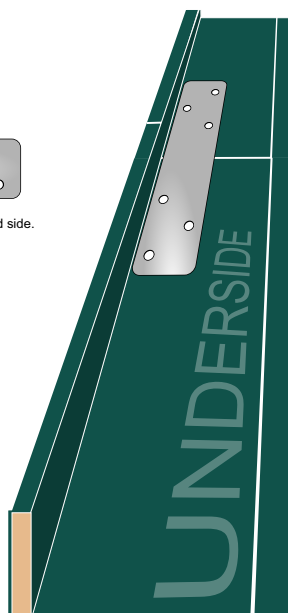

C

1-HOLE "C" CLAMP BRACKETS
1 1/2"

1-Hole C Clamps are used mainly on all horizontals. They come in all sizes, based on the diameter of the post/rails. These are used when lip returns are required on pads that run horizontally or vertically, as well.



D


CORNER BRACKETS
1 1/2" x 2 1/2"

Attaches to all end pieces. You can only screw into the outside pad and friction fit to the metal or use a metal self-tapping screw to go into the metal pole. Either way is acceptable.




B


STEEL MENDING PLATE
3" x 6"



Attaches to backside to connect all rail sections.

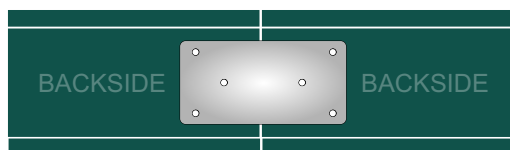

For vertical middle rail installation, make sure to split the difference on the vertical and the horizontal pad by creating a half moon effect on the middle plate holes.

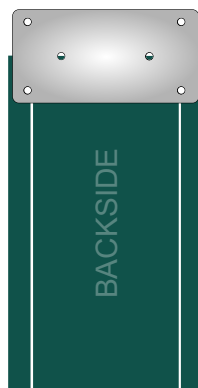

E

2-HOLE "C" CLAMP BRACKETS
1 1/2"

2-Hole C Clamps are used mainly on middle vertical posts when the pad can be centered to hit both holes in the C Clamp. They come in all sizes based on the diameter of the post/rails.



For video step-by-step instructions, visit:
Fieldwallpads.com/about/instructions